


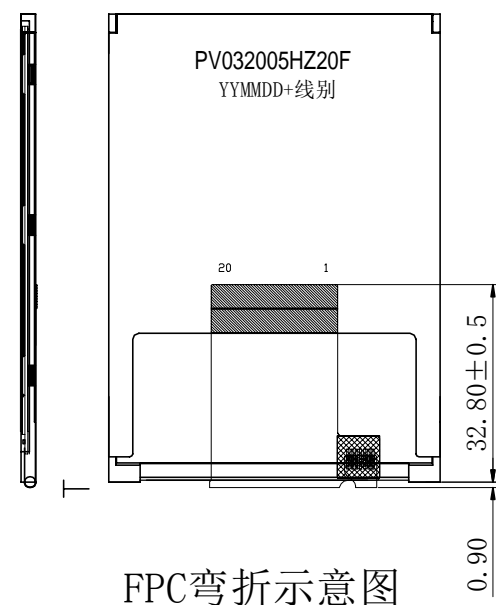
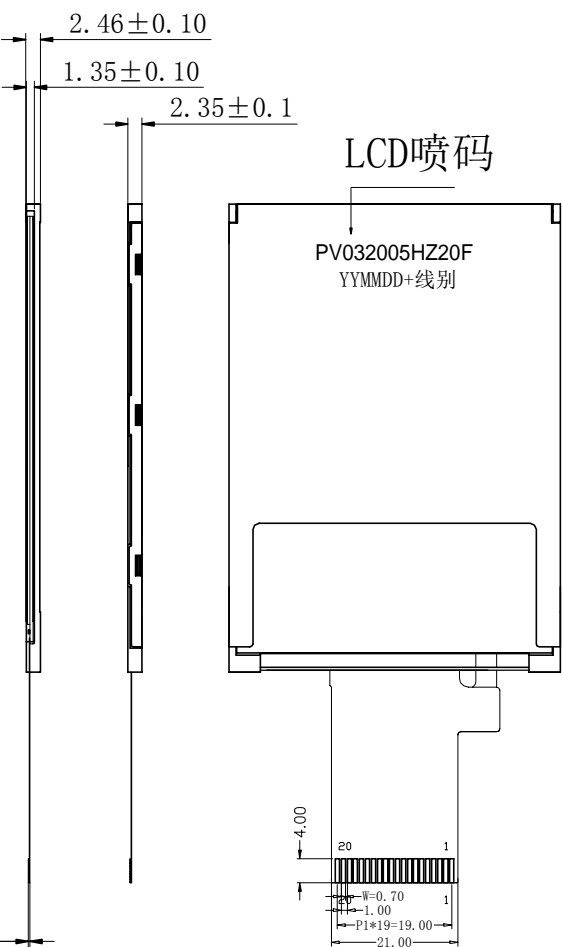


Pad No.	Pad Name
1	GND
2	RESET
3	DB7
4	DB6
5	DB5
6	DB4
7	DB3
8	DB2
9	DB1
10	DB0
11	RD
12	WR
13	RS
14	CS
15	GND
16	VCI
17	VCI
18	GND
19	LED-A
20	LED-K

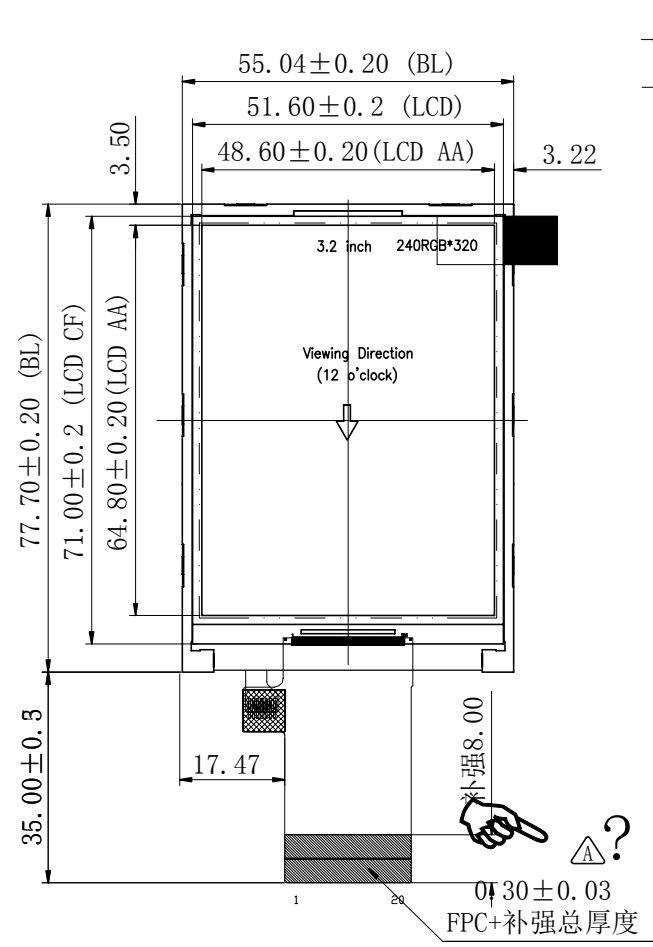

Specification:

- 1). Display mode: 262K TFT/Transmissive
- 2). Viewing angle: 12 °O Clock Gray inversion
- 3). Operating temp.: -10° C~+60° C
Storage temp.: -20° C~+70° C
- 4). IC:ST7789V
- 5). Backlight: 6 chip White LED
- 6). Dimensions with mark "*" are important, with mark "()" are referenced

Kingtech Group Co.,Ltd.	TITLE: ASSEMBLY		DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2			
	PART NO.:		PV032005HZ20F			
	DRAWN BY:		DATE:		PROJECTION:	
	CHECKED BY:		DATE:		SCALE: N.T.S	UNIT: mm
	APPROVED BY:		DATE:		SHEET: 1 OF 1	