

8 7 6 5 4 3 2 1

已确认此版本的所有图纸

客户签名: 日期:


REV	DESCRIPTION	DATE
1.0	首次设计:	2023-11-03

D

C

B

A

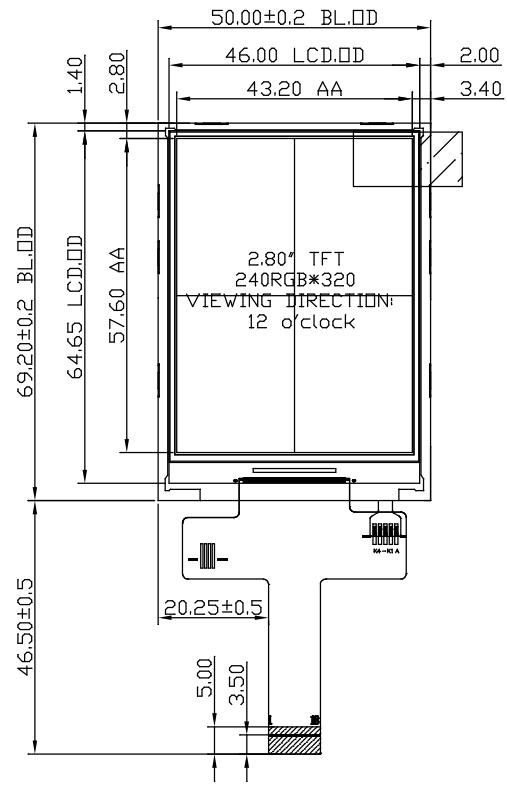

2.40±0.2

0.30±0.05  
FPC+PI

Pin Assignment	
1	GND
2	RESET
3	SCL
4	RS
5	CS
6	SDA
7	SDO
8	GND
9	VCI
10	LEDA
11	LEDK
12	LEDK
13	LEDK
14	LEDK
15	XL
16	YU
17	XR
18	YD

D


C

B

A

Notes:

1. Display Mode: 262K TFT/Normally White
2. Viewing Angle: 12 O'Clock
3. LCD Driver IC: ST7789T3
4. Operating Temp: -20° C ~ +70° C
5. Storage Temp: -30° C ~ +80° C
6. \*:Critical Dimension, ( ):Reference Dimension
7. Undefined Tolerance: ±0.2
8. Surface Luminance: TBD CD/M<sup>2</sup> (TYP)
9. Requirements on Environmental Protection: ROHS



**KINGTECH**

TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2	
PART NO.:	PV02823H0118Q		
DRAWN BY:		DATE:	SECTION: OF
CHECKED BY:		DATE:	SCALE: N.T.S UNIT: mm
APPROVED BY:		DATE:	

8 7 6 5 4 3 2 1