

8 7 6

已确认此版本的所有图纸

客户签名: 日期:





REV	DESCRIPTION	DATE
1.0	首次设计;	2023-07-06

正视图

侧视图

背视图

FPC弯折示意图
FPC展开出货

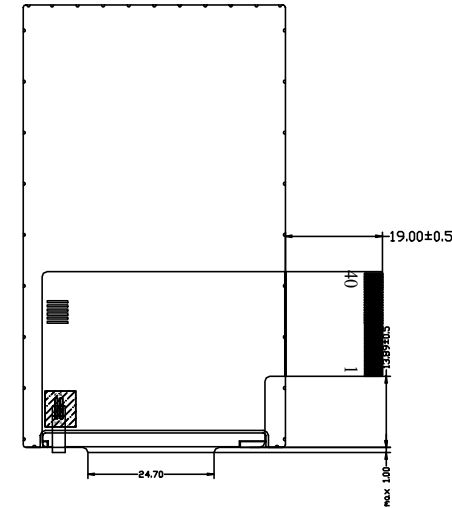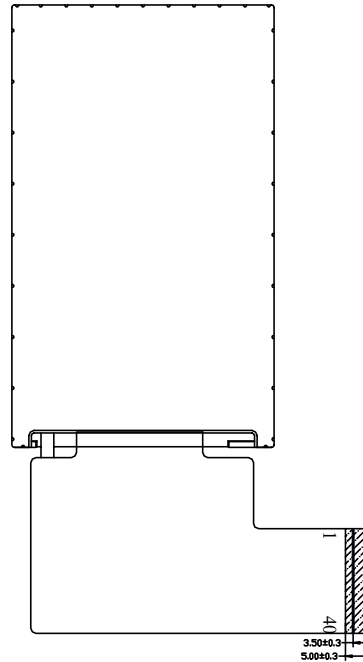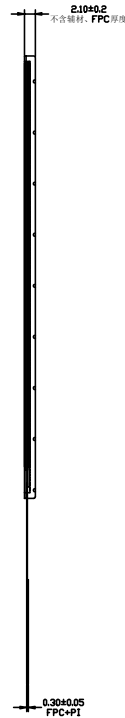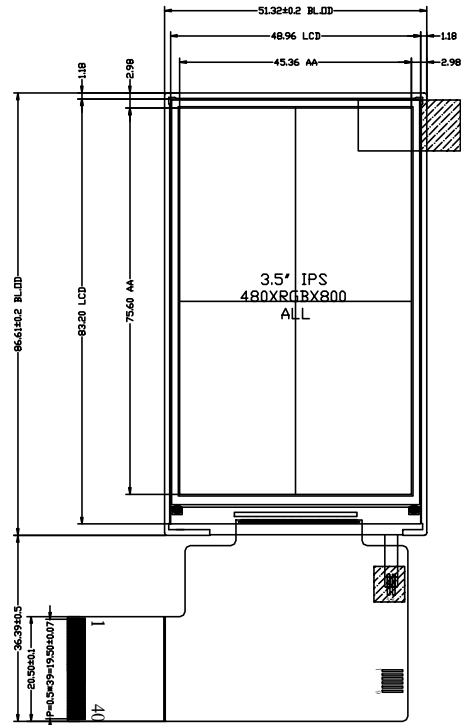

Pin Assignment	
1	LEDK
2	LEDA
3	GND
4	VCI
5~12	RO~R7
13~20	GO~G7
21~28	BO~B7
29	GND
30	PCLK
31	TP_RESET
32	HSYNC
33	VSYNC
34	DE
35	TP_INT
36	GND
37	RESET
38	CS
39	SCL
40	SDA

Notes:

1. Display Mode: 16. 7M TFT/Normally Black
2. Viewing Angle: ALL
3. LCD Driver IC: ST7701SN
4. Operating Temp: -20° C ~ +70° C
5. Storage Temp: -30° C ~ +80° C
6. *:Critical Dimension, ():Reference Dimension
7. Undefined Tolerance: ±0.2
8. Surface Luminance: TBD CD/M (TYP)
9. Requirements on Environmental Protection: ROHS

PIN(A) PIN(K)

20mA 21V(TYP)

TITLE: ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2	
	PART NO.: PV03520H0140T	
DRAWN BY:	DATE:	PROJECTION: OF
CHECKED BY:	DATE:	SCALE:N.T.S UNIT: mm
APPROVED BY:	DATE:	

Kingtech Group Co.,Ltd.

8 7 6 5 4 3 2 1