



Signature: _____ Date: _____

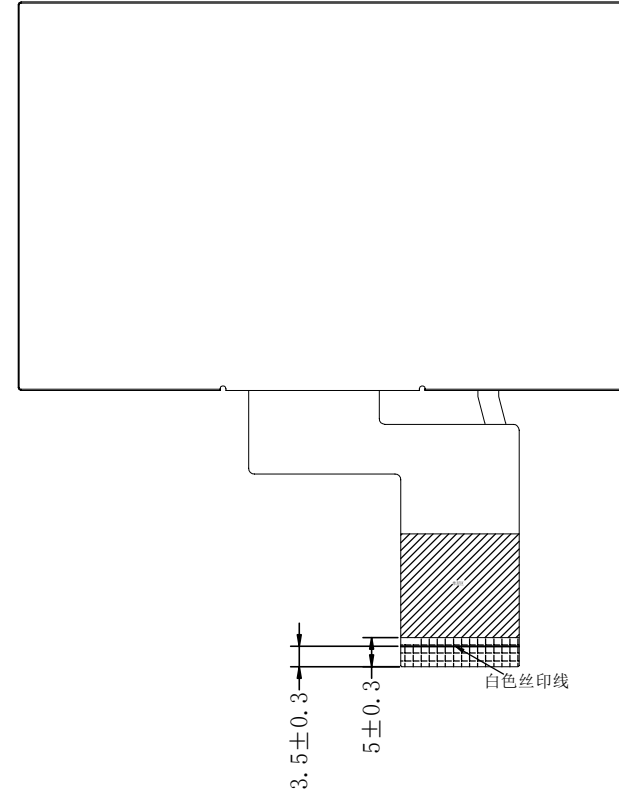


REV.	DESCRIPTION	REVISER	DATE
V0	NEW	Aleck	20201105

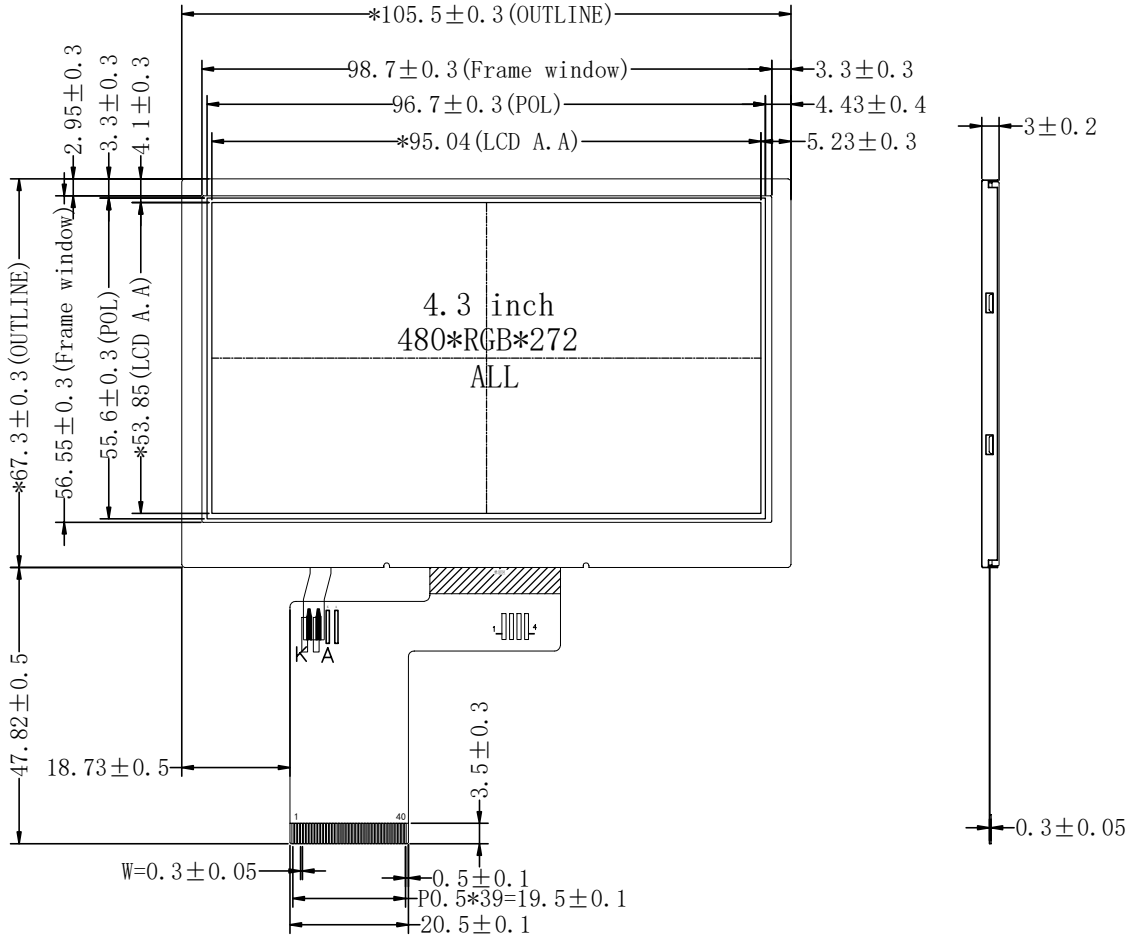

PIN	description
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

NOTE:

1. DISPLAY TYPE: 4.3" TFT, TRANSMISSIVE
2. DRIVER IC: SC7283
3. VIEWING DIRECTION: 85/85/85/85
4. OPERATING TEMPERATURE: -30° C ~ +80° C.
5. STORAGE TEMPERATURE: -30° C ~ +80° C.
6. BACKLIGHT TYPE: 16 WHITE LEDS.
7. LED: If=20.0mA/LED (CONSTANT CURRENT).
8. MUST MEET THE REQUIREMENT OF ROHS



VF: 24.0V IF=40mA
 BACKLIGHT DIAGRAM
 1100nits (Typ.)

Kingtech Group Co., Ltd.

Unspecified Tolerance: ±0.20	UNITS: mm	DATE:	MODEL NUMBER :		SHEET:	1 of 1
DESIGN BY:			PV043031Y0140B		DRAWING DESCRIPTION:	LCM
CHECKED BY:			OS-RDD-07-00ST-8	PROJECTION		
APPROVED BY:						