




REV.	DESCRIPTION	REVISER	DATE
V0	FIRST	gong	20221108

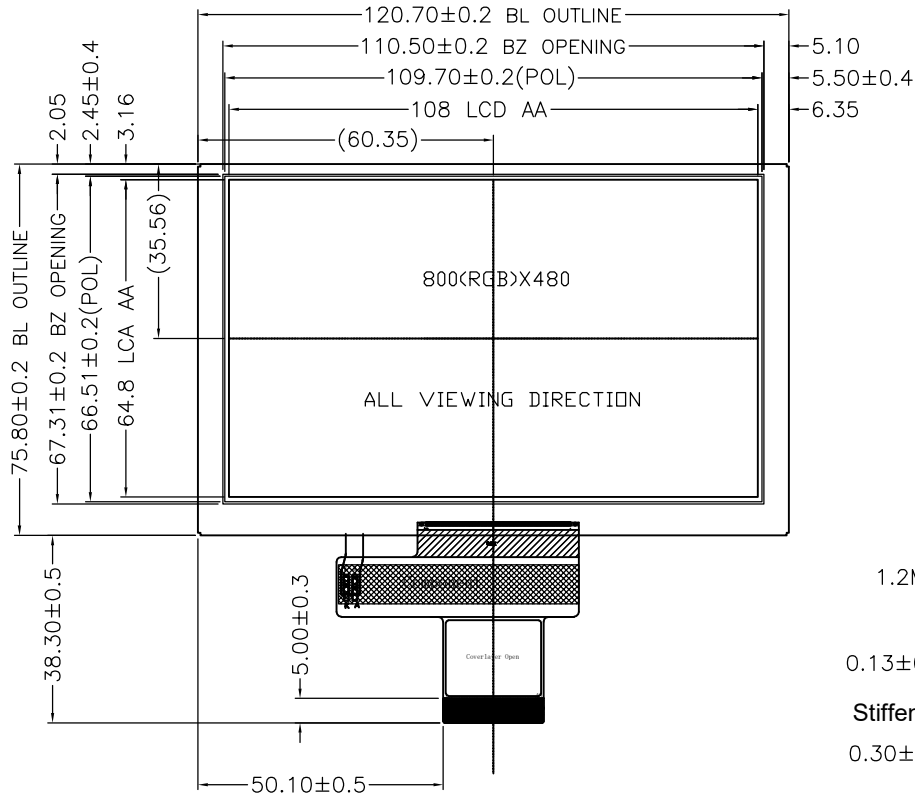

3±0.2


1.2MAX
0.13±0.03
Stiffener
0.30±0.05
Conductor side



3.50±0.3
20.50±0.07
P=0.50±0.03
W=0.30±0.03
P=0.50±0.03
P0.5*49=19.50

PIN SYMBOL

PIN NO.	Symbol
1	NC
2	VDD
3	VDD
4	NC
5	RESET
6	STWB
7	GND
8	RX1N0-
9	RX1N0+
10	GND
11	RX1N1-
12	RX1N1+
13	GND
14	RX1N2-
15	RX1N2+
16	GND
17	RX1K1N-
18	RX1K1N+
19	GND
20	RX1N3-
21	RX1N3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB
29	NC
30	GND
31	LEBK
32	LEBK
33	L/R
34	U/D
35	NC
36	NC
37	NC
37	NC
39	LEDA
40	LEDA

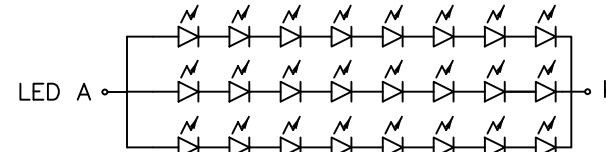

LED; IF =60mA, VF=24V
800cd/m² (MIN), 1000cd/m² (Typ)

NOTES:

- 1.DISPLAY TYPE: 5.0"TFT
- 2.VIEWING DIRECTION:ALL WIEW inversion)
- 3.LCD DRIVE IC:ST7265
- 4.POLARIZER MODE: TRANSMISSIV / NEGATIVE
- 5.OPERATING TEMP: -20°C~+70°C
- 6.STORAGE TEMP: -30°C~+80°C
- 7.UNMARKER TOLERANCE: ±0.20
- 8.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

Kingtech Group Co.,Ltd.

Unspecified Tolerance: ±0.20	UNITS: mm	DATE: 20221108	MODEL NUMBER: PV05018Y0140U		SHEET: 1 Of 1
DESIGN BY: gong	CHECKED BY:	APPROVED BY:	PROJECTION		DRAWING DESCRIPTION: LCM