

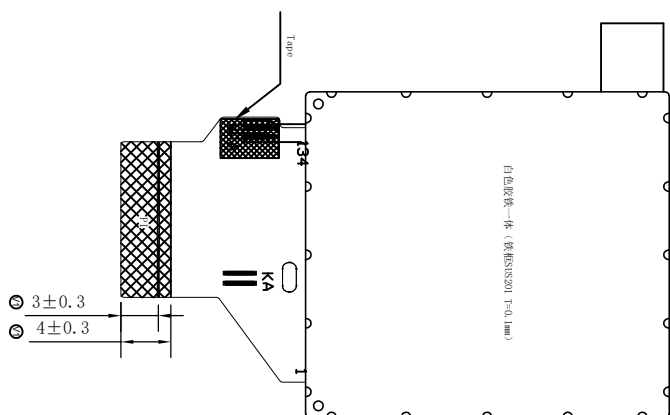


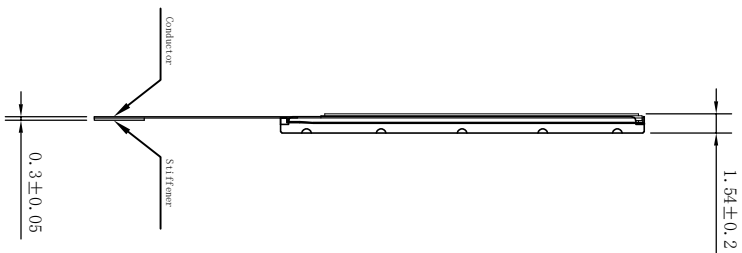


REV.	DESCRIPTION	REVISION	DATE
V0	Change to 7*0.2mm LCD	ROMG	20230815
V1			
V2			

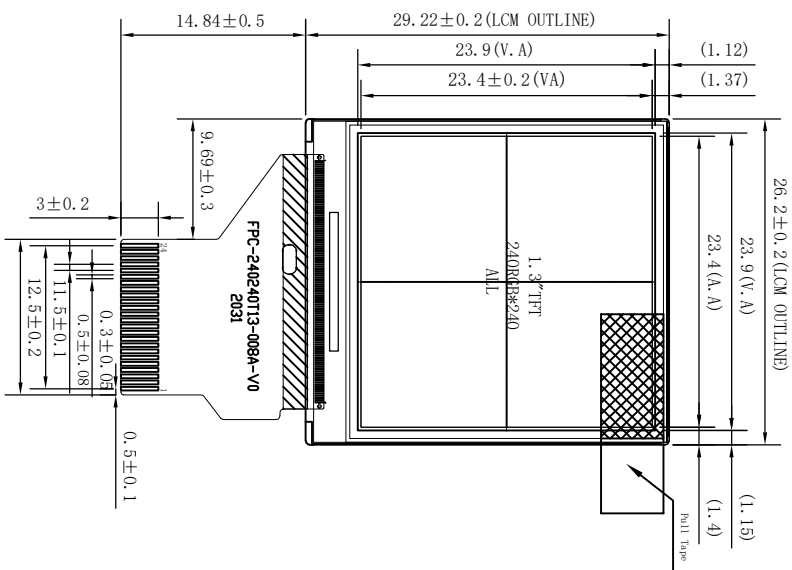

PIN	SYMBOL
1	LEDA
2	LEDK
3	GND
4	VDD2.8V
5	IOVCC1.8V
6	IM1/2
7	RESET
8	CS
9	DC(SCLK)
10	WR(A0)
11	RD
12	SDA
13	DB0
14	DB1
15	DB2
16	DB3
17	DB4
18	DB5
19	DB6
20	DB7
21	TE
22	NC
23	GND
24	GND

4-Wire SPI & 8 Bit MCU interface
Pin 6:

IM1/2=1 4-Wire SPI Mode
IM1/2=0 8 Bit MCU Mode



- TFT NOTES:
1. Display Type: IPS Transmissive TFT;
 2. Backlight: 2-chips LED, series;
 3. View Direction: ALL;
 4. Driver IC: S17789V
 5. General Tolerance: ±0.2;
 6. Operating Temperature: -20° - +70° C
 7. Storage Temperature: -30° - +80° C
 8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

Kingtech Group Co., Ltd

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER:	PROJECTION	SHEET:	1 OF 1
DESIGN BY:				PV01311Y0124L		DRAWING DESCRIPTION:	LCM
CHECKED BY:							
APPROVED BY:							