


已确认此版本的所有图纸

客户 签名: \_\_\_\_\_ 日期: \_\_\_\_\_


REV	DESCRIPTION	DATE
1.0	初次设计	2021-8-19

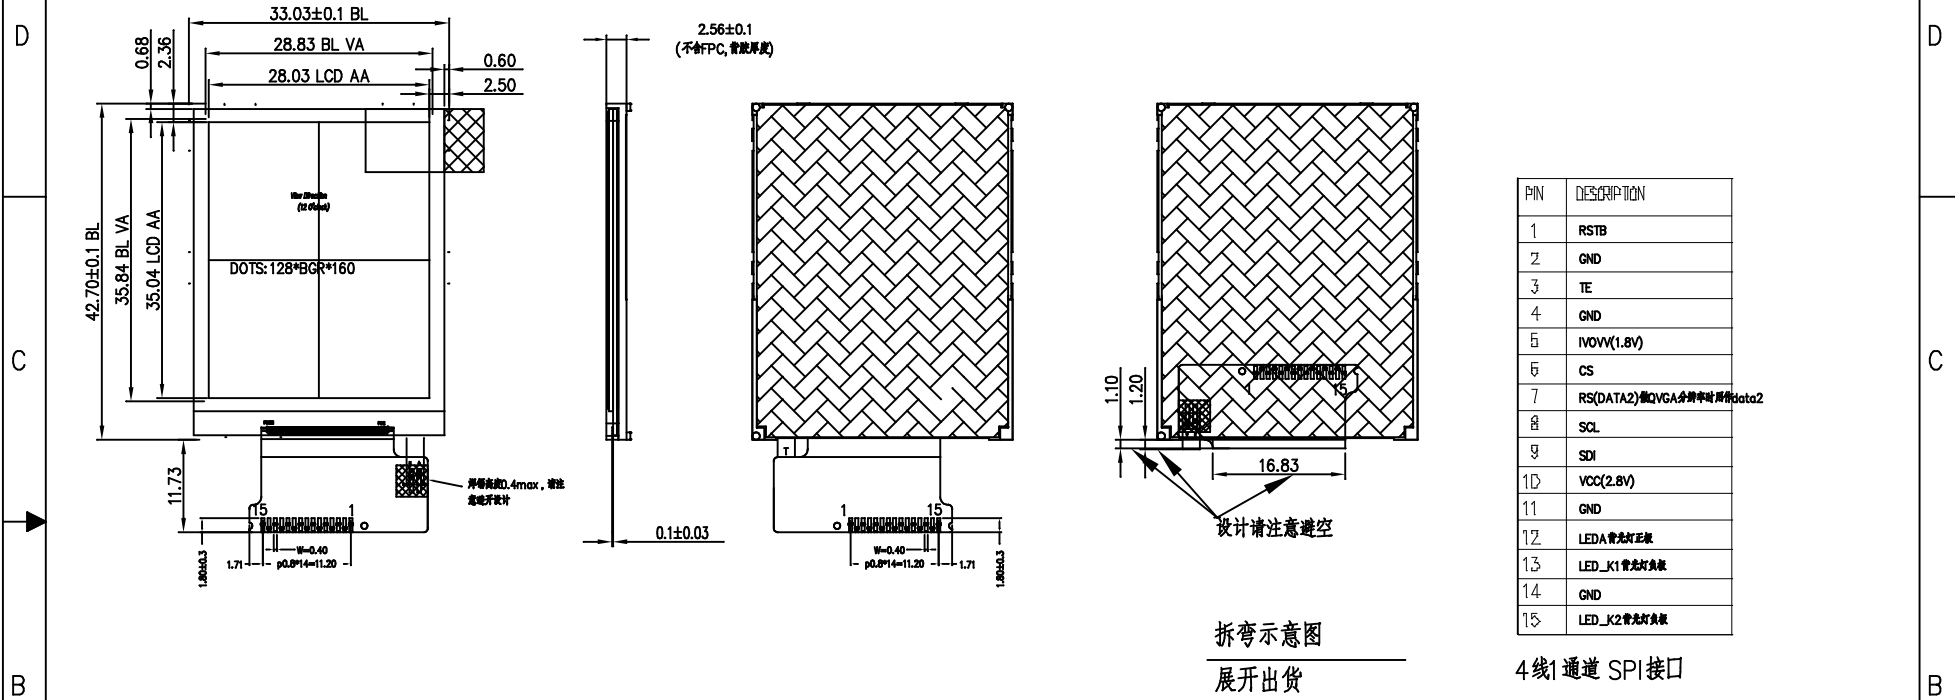

PIN	DESCRIPTION
1	RSTB
2	GND
3	TE
4	GND
5	IVOVV(1.8V)
6	CS
7	RS(DATA2) 做QVGA分辨率时屏体data2
8	SCL
9	SDI
10	VCC(2.8V)
11	GND
12	LED_A 白光灯正极
13	LED_K1 白光灯负极
14	GND
15	LED_K2 白光灯负极

4线1通道 SPI接口

- NOTES:
1. Display type: TFT1.77"
  2. Viewing direction: 12 O'CLOCK
  3. Drive IC: ST7735S
  4. Backlight color: LED W@ILE
  5. Operation temperature: -10~60°C
  6. Storage temperature: -20~70°C
  7. LCM Operating Voltage: Vdd=2.8V
  8. VAmDs: OTHER



TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE: ±0.2	
PART NO.:	PV017707H0115G		
DRAWN BY:		DATE:	
CHECKED BY:		DATE:	
APPROVED BY:		DATE:	
PROJECTION:			
SCALE: N.T.S		UNIT: mm	
SHEET: 1 OF 1			