

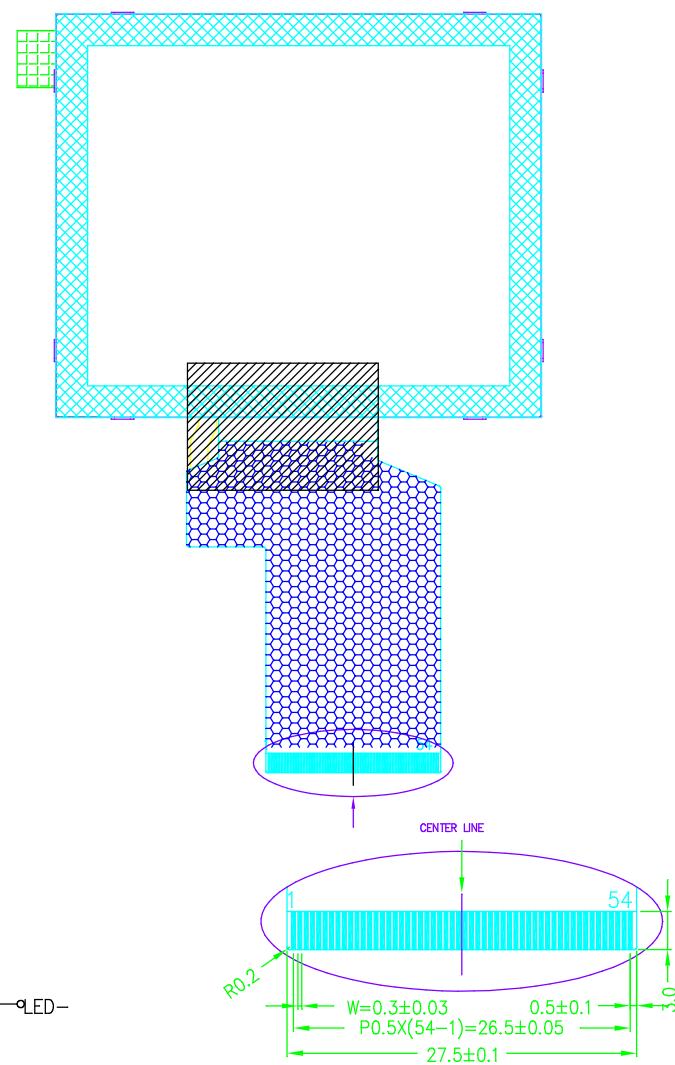
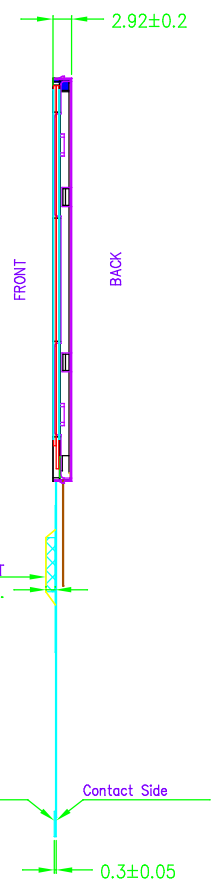


REV: A	First Issue
REV: B	Add tape to protect FPC

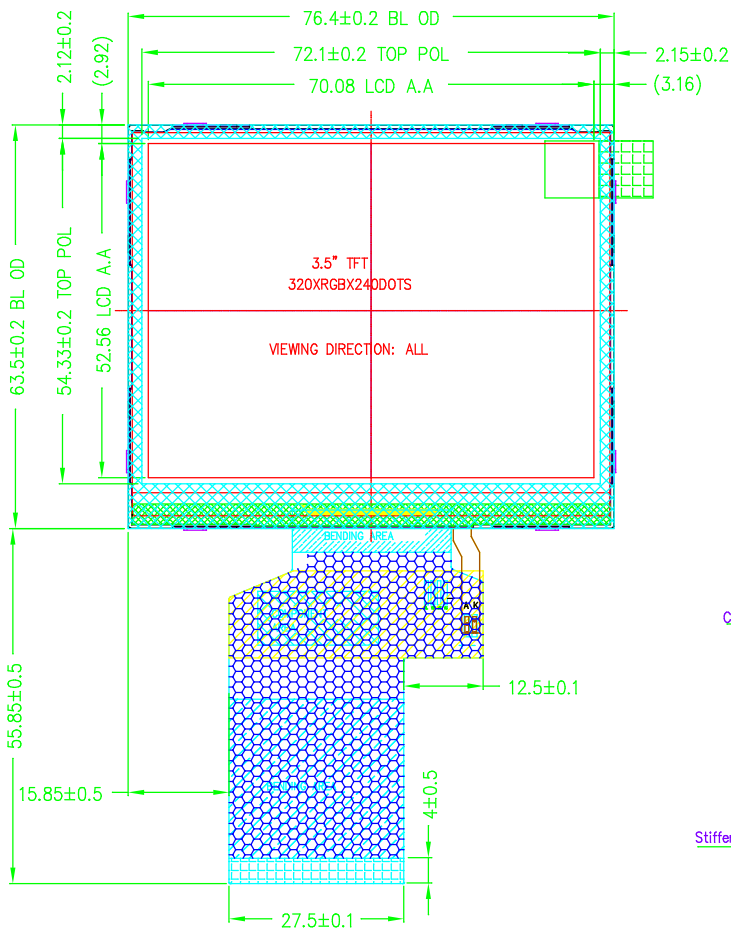

NO.	PIN NAME
1	LED-
2	LED-
3	LED+
4	LED+
5	NC(YU)
6	NC(XR)
7	NC
8	RESET
9	SPENA
10	SPCLK
11	SPDAT
12	B0
13	B1
14	B2
15	B3
16	B4
17	B5
18	B6
19	B7
20	G0
21	G1
22	G2
23	G3
24	G4
25	G5
26	G6
27	G7
28	R0
29	R1
30	R2
31	R3
32	R4
33	R5
34	R6
35	R7
36	HSYNC
37	VSYNC
38	DCLK
39	NC
40	NC
41	VCC
42	VCC
43	NC(YD)
44	NC(XL)
45	NC
46	NC
47	VD
48	HD
49	PS
50	DISP
51	NC
52	DE
53	GND
54	GND

Screen Size:	3.5(inch)	OP Temperature:	-20~+70°C	Backlight Characters:	40mA/24V
View Direction:	Full view	ST Temperature:	-30~+80°C	Luminance + LED:	1000nit/8PCS
Grey scale:	N/A	Analog Voltage:	3.3V	Driver	ST7272A
Display mode:	IPS	Digital Voltage:		Remitder	

Outline		NAME: PV03527H0554A		
VER: B	U: mm	S: 1:1	Date: 20230519	
APPROVED		CHECKED	DRAWN	

Kingtech Group Co., Ltd.

ROHS must be compiled Unspecified tolerance is ±0.2mm