



已确认此版本的所有图纸  
 客户签名: \_\_\_\_\_ 日期: \_\_\_\_\_

REV	DESCRIPTION	DATE
1.0	首次设计;	2023-05-10
1.0	修改LED灯数量;	2023-05-13


正视图

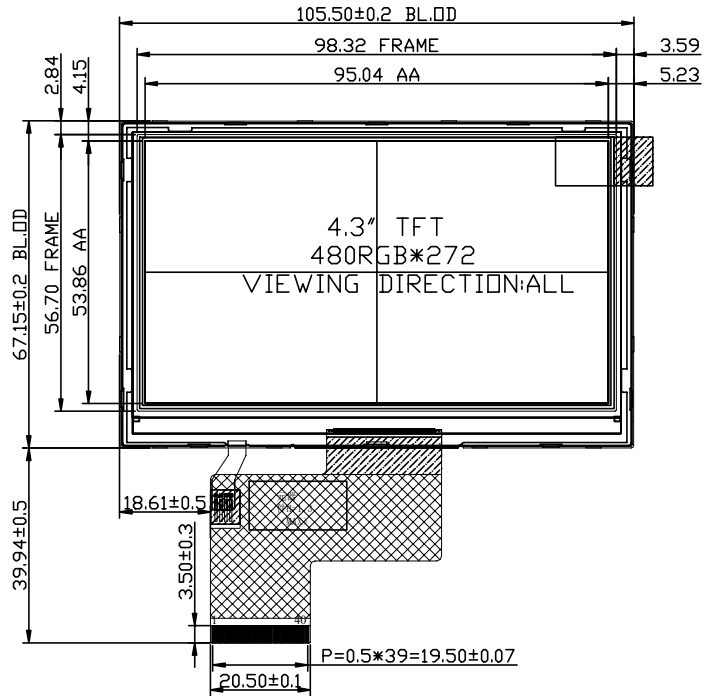

侧视图

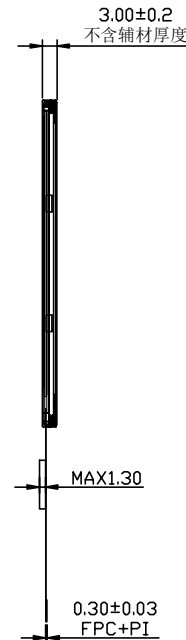

背视图

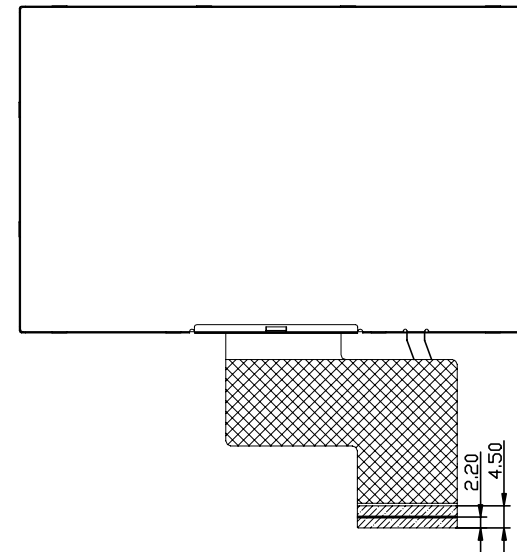

PIN FUCTION	
PIN	SYMBOL
1	VLED-K
2	VLED-A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	NC(DE)
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)



I=40mA V=24V (TYP)

Notes:

1. Display Mode: 16. 7M TFT/Normally Black
2. Viewing Angle: ALL
3. LCD Driver IC: SC7283
4. Operating Temp: -30° C ~ +85° C
5. Storage Temp: -30° C ~ +85° C
6. \*:Critical Dimension, ( ):Reference Dimension
7. Undefinition Tolerance: ±0.2
8. Surface Luminance: 900 CD/M (MIN)
9. Requirements on Environmental Protection: ROHS

Kingtech Group Co.,Ltd.

TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2	
PART NO.:	PV043028H0140Y		
DRAWN BY:		DATE:	PROJECTION: OF
CHECKED BY:		DATE:	SCALE:N.T.S UNIT: mm
APPROVED BY:		DATE:	