


All Pages Of This Edition Approved

Signature: _____ Date: _____


REV.	DESCRIPTION	REVISER	DATE
V0	NEW	Rong	2023.11.22
V1			

ROHS

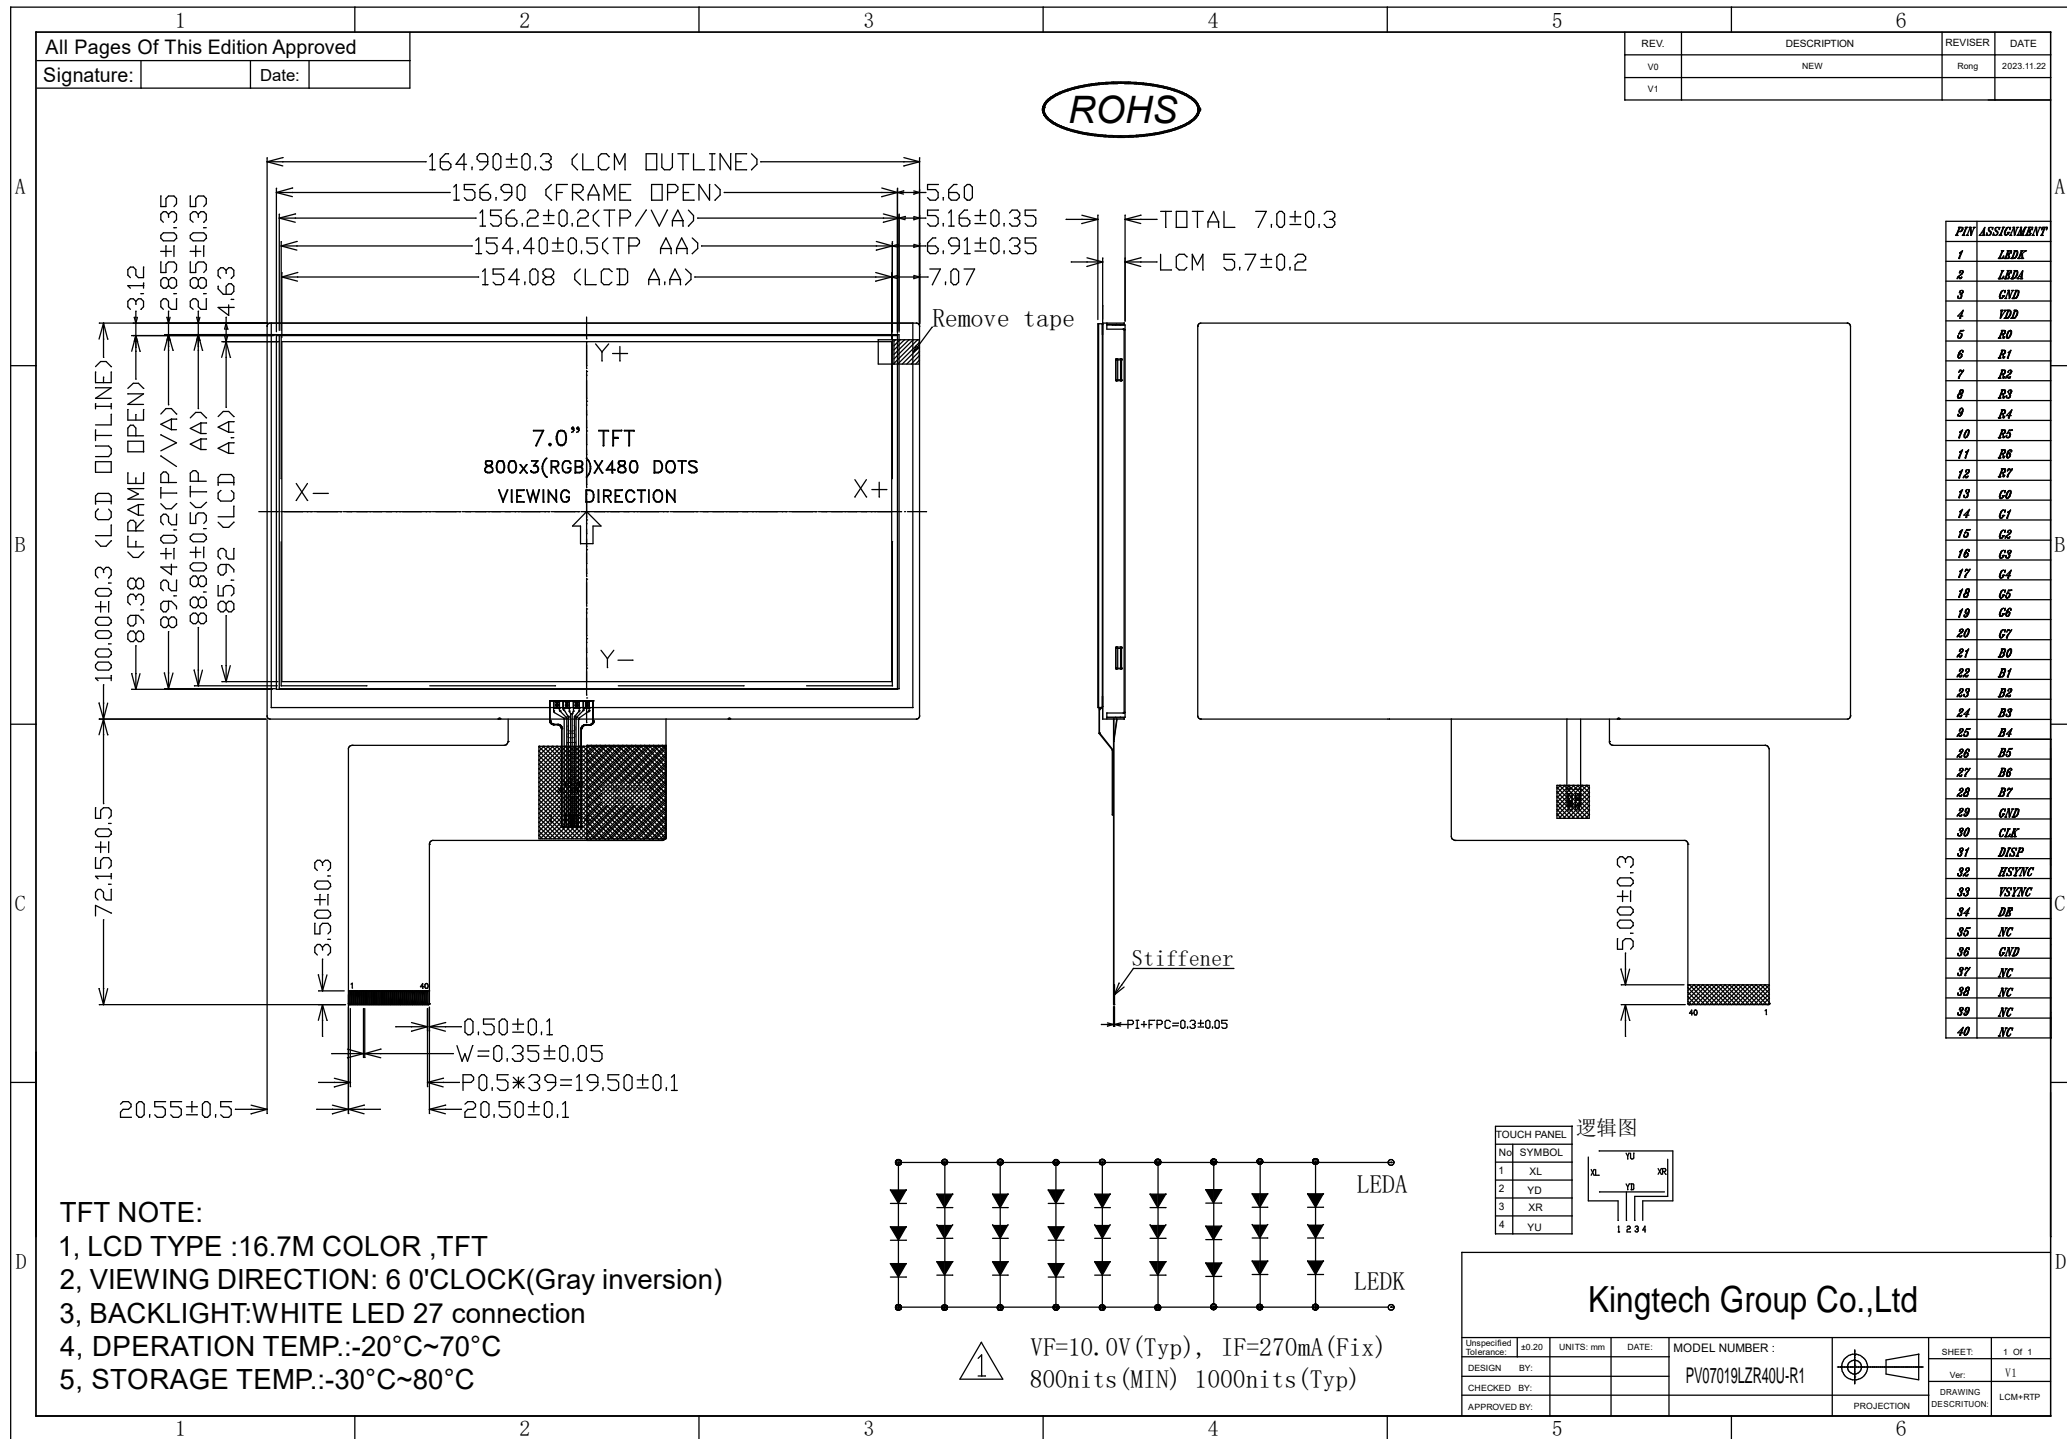


PIN	ASSIGNMENT
1	LEDK
2	LEDA
3	GND
4	VDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	FSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC

TFT NOTE:
 1, LCD TYPE :16.7M COLOR ,TFT
 2, VIEWING DIRECTION: 6 O'CLOCK(Gray inversion)
 3, BACKLIGHT:WHITE LED 27 connection
 4, DPERATION TEMP.: -20°C~70°C
 5, STORAGE TEMP.: -30°C~80°C

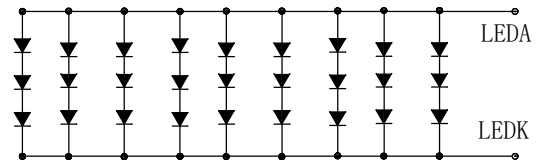

VF=10.0V(Typ), IF=270mA(Fix)
 800nits(MIN) 1000nits(Typ)



Kingtech Group Co.,Ltd

Unspecified Tolerance: ±0.20	UNITS: mm	DATE:	MODEL NUMBER :	SHEET: 1 of 1
DESIGN BY:			PV07019LZR40U-R1	Ver: V1
CHECKED BY:				DRAWING DESCRIPTION: LCM+RTP
APPROVED BY:				PROJECTION