


REV.	DESCRIPTION	DATE
VA	NEW	

PIN ASSIGNMENT	PIN ASSIGNMENT
1	LBDA
2	LBDA
3	LBDA
4	LBDA
5	GND
6	VCOM
7	DVDD
8	MODE
9	DE
10	VS
11	BS
12	B7
13	B6
14	B5
15	B4
16	B3
17	B2
18	B1
19	B0
20	C7
21	C6
22	C5
23	C4
24	C3
25	C2
26	C1
27	G0
28	R7
29	R6
30	R5
31	R4
32	R3
33	R2
34	R1
35	R0
36	GND
37	DC1A
38	GND
39	L/R
40	U/D
41	VGE
42	VEL
43	A/D0
44	RESSET
45	NC
46	VCOM
47	DITFB
48	GND
49	NC
50	NC

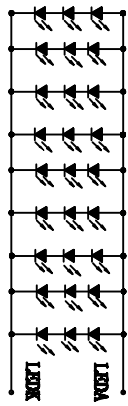

PIN	SYMBOL
1	GND
2	GND
3	VDD
4	INT
5	RESSET
6	SCL
7	SDA
8	GND

VP-9, 6V (Typ), TP-270ma (Fix)  
640dots (LIN), 700dots (Typ)

# Kingtech Group Co., Ltd.

REVISION	DATE	MODE NUMBER	DESCRIPTION	DATE
DESIGN BY:		PV070370150N-CT		
CHECKED BY:				
APPROVED BY:				

- 技术参数:**
1. 结构G+G: Cover Glass+LOCA+ITO GLASS+FPC, Cover Glass: 1.1mm, LOCA: 0.15mm, 普通 TO Glass: 0.70mm, 总厚度: 1.95±0.15mm;
  2. IC型号: HY4633, 5点触摸 通道数: TX21\*RX12; 工作电压: 3.3V, 中断方式: 下拉脉冲; FPC接口线为IC标准接口, IO电压: 3.3V;
  3. 透光率: ≥85%; TP分辨率: X: 800, Y: 480  
工作温度范围: -20℃~+70℃, ≤90%RH;  
储存温度范围: -30℃~+80℃, ≤90%RH;
  4. 表面硬度: ≥6H (铅笔硬度测试);
  5. Cover Glass 材质: 钢化玻璃(旭硝子); 产品符合RoHS标准

- NOTES:**
1. DISPLAY TYPE: 7.0" TFT
  2. VIEWING DIRECTION: 80/80/80/80
  3. POLARIZER MODE: TRANSMISSIVE/POSITIVE
  4. OPERATING TEMP: -20° C~+70° C
  5. STORAGE TEMP: -30° C~+80° C
  6. UNMARKER TOLERANCE: ±0.20