

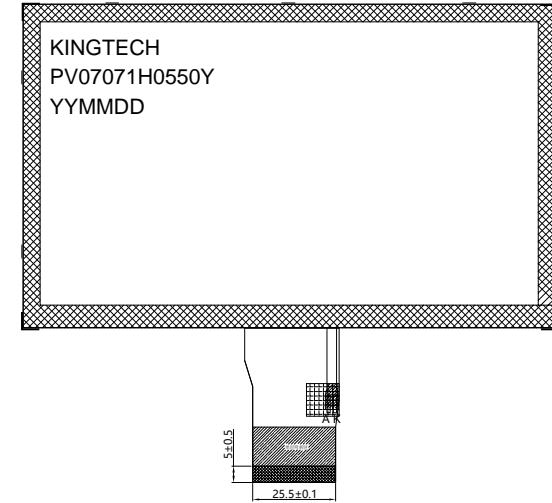
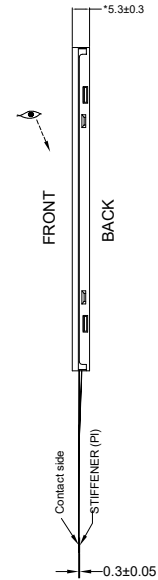


REV: A	First Issue
REV: B	Change BL current

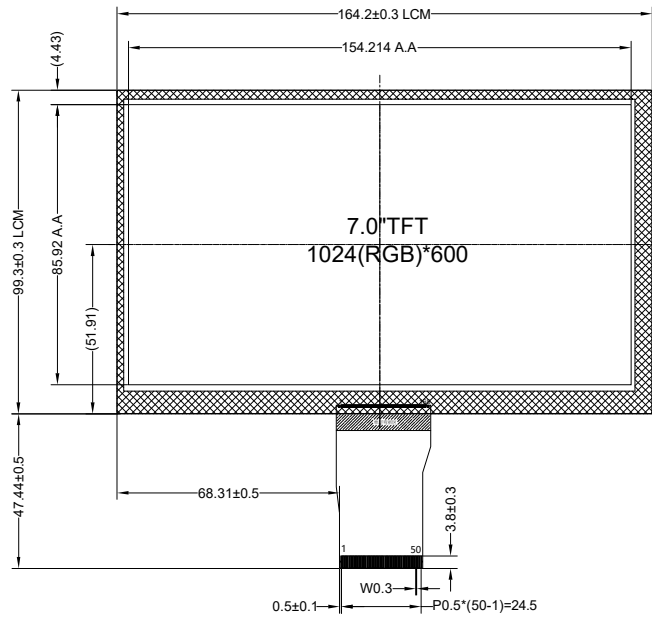

PIN	SYMBOL	PIN	SYMBOL
1	LED-A	26	G1
2	LED-A	27	G0
3	LED-K	28	R7
4	LED-K	29	R6
5	GND	30	R5
6	VCOM	31	R4
7	DVDD	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VS	35	R0
11	HS	36	GND
12	B7	37	DCLK
13	B6	38	GND
14	B5	39	L/R
15	B4	40	U/D
16	B3	41	VGH
17	B2	42	VGL
18	B1	43	AVDD
19	B0	44	RESET
20	G7	45	NC
21	G6	46	VCOM
22	G5	47	DITHB
23	G4	48	GND
24	G3	49	NC
25	G2	50	NC

Screen Size:	7.0(inch)	OP Temperature:	-30~+85°C	Backlight Characters:	300mA
View Direction:	Full View	ST Temperature:	-30~+85°C	Luminance + LED:	1000nit/30PCS
Grey scale:		Analog Voltage:	3.3V	Driver IC :	EK79001+EK73215
Display mode:	IPS	Digital Voltage:		Reminder :	

Kingtech Group Co., Ltd.		Outline	NAME:PV07071H0550Y		
		VER: B	U: mm	S: 1:1	Date: 20230513
APPROVED		CHECKED	DRAWN		
		ROHS must be complied Unspecified tolerance is ±0.25mm			