
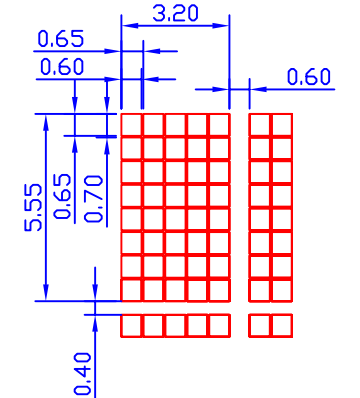
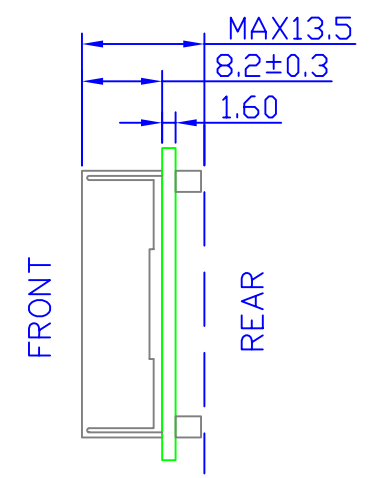


REV.	CHANGE CONTENT	BY	DATE

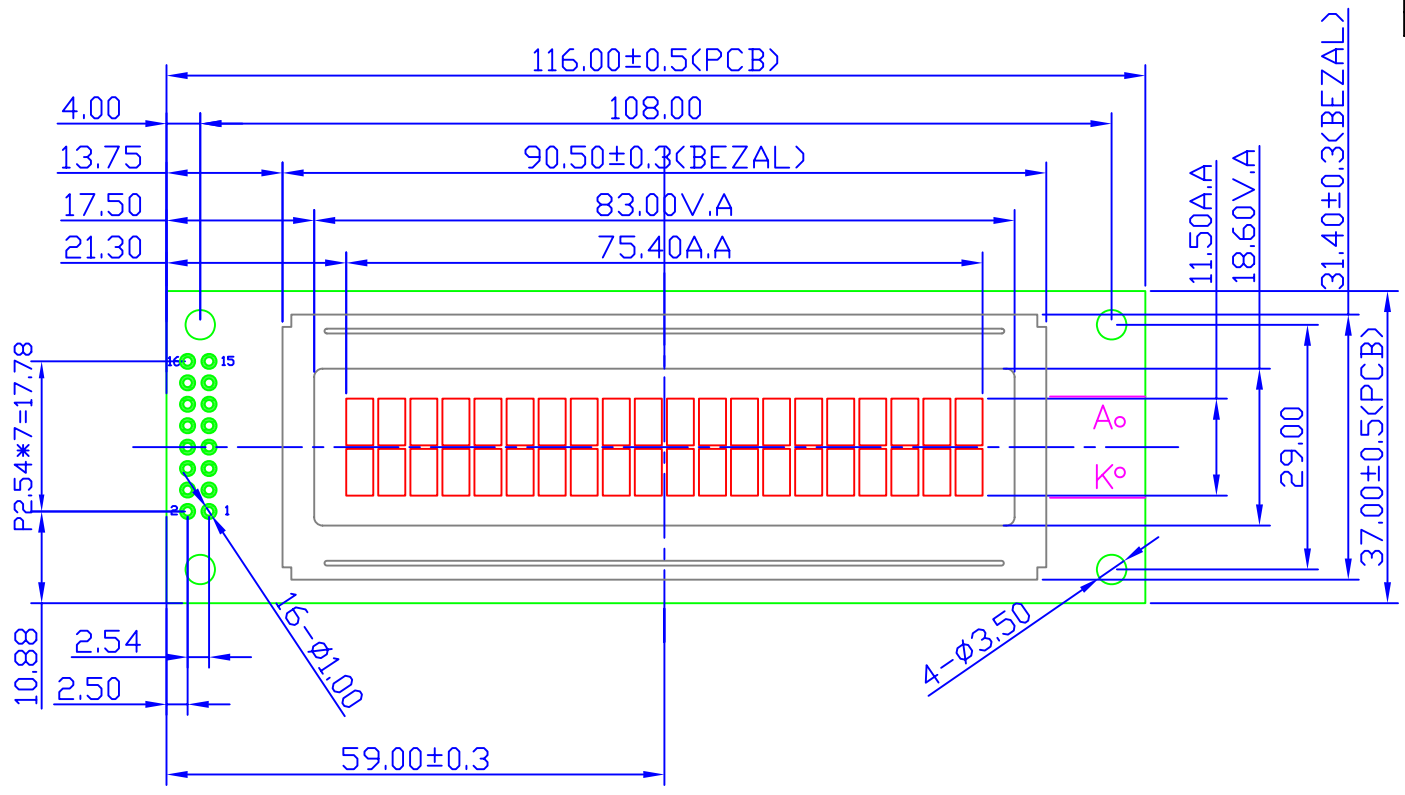

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	V0	RS	R/W	E	D0	D1	D2	D3	D4	D5	D6	D7	BLA	BLK

- NOTE:
- LCD TYPE: STN-BLUE-NEGATIVE
  - POLARIZER MODE: TRANSMISSIVE
  - DRIVE METHOD: 1/16 DUTY, 1/5 BIAS, Vop=4.5V
  - VIEWING DIR.: 6:00
  - OP. TEMP.: -20°C~70°C
  - ST. TEMP.: -30°C~80°C
  - BACKLIGHT: COLOR-WHITE, Vf=5.0V, If=45mA
  - LCD CONTROLLER: ST7066U-0A, VDD=5.0V
  - ROHS COMPLIANT

Kingtech Group.,Ltd

DRAWING No. : PV200201C  
 DRAWING TITLE: LCM DRAWING  
 FILE NO. : 8

DESIGN		STANDARD		REV. : A	SCALE : -
CHECKED		TECHNOLOGY		PROJECTION:	UNIT : mm
APPROVED		Q.A			SHEET : 1/1